

Swimming pool equipment

Bottom inlet nozzle

With polished adjustable front. Recommended for larger pools and public facilities. Placed in the bottom of the pool to ensure the water keeps circulating. Suitable for concrete pools.

12550 Recommended flow capacity max 6 m³/h.


12560 Recommended flow capacity max 8 m³/h.



Item no.	Type	Bottom inlet nozzle
12550	A-1	Acid proof stainless steel AISI 316L, adjustable for different flows. Outside thread 1 1/2". For concrete pools.
12560	A-2	As above but with outside thread 2".

Features

- Polished front
- Acid proof stainless steel AISI 316L
- Adjustable water flow
- Suitable for concrete pools

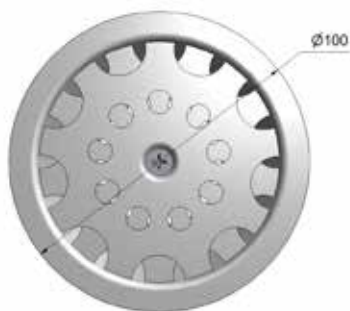

Item no. 12550



Item no. 12560



Non leak flange

Accessory. Non leak flange for inlets and suction nozzles.

Item no.	Type	Non leak flange
12640	NFL255	Acid proof stainless steel AISI 316L, with sealing flange. Inside thread 1 1/2". Length 255 mm.